


# QuickBOLT

SOLUTIONS FOR SOLAR MOUNTING

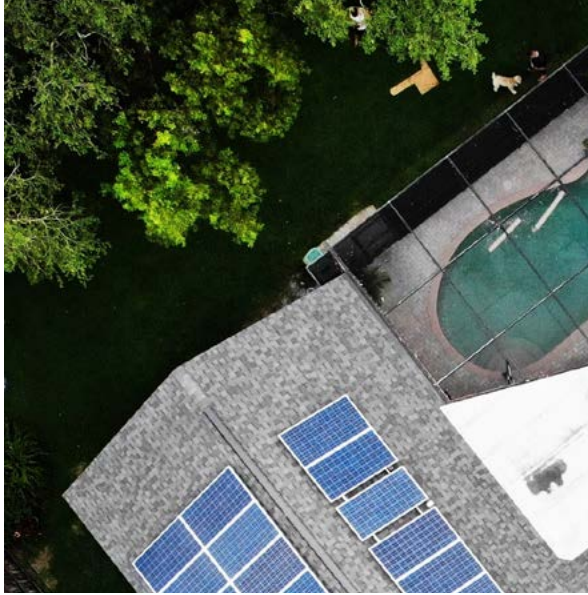

QB2 with Microflashing®. See page 5.

ISSUE 5

## CATALOG

Take a look inside at QuickBOLT's innovative solar mounting solutions for Asphalt Shingle, TPO, EPDM, Tile, Stone Coated Steel, and Metal roofs

**WITH CLICKABLE LINKS**

QUICKBOLT.COM | (844) 671-6045

A Division of Quickscrews International Corp.





## ABOUT **QUICKBOLT**

QuickBOLT simplifies solar mounting. Our extensive range of innovative mounts for residential and commercial roofs in the US includes patented products and custom production services. With over a decade of experience, we've partnered with solar installers from every part of the US to streamline installations. Our experienced team is here to understand your goals and provide solutions for faster and more reliable solar mounting.

QuickBOLT mounts are recognized for their reliability by Sunnova, who features our products on their Approved Vendor list. Our QB2 and Butyl Bottom Deck mounts are Miami-Dade approved thanks to their reliability and superior performance in high-velocity wind areas.

**APPROVED BY:**

**sunnova**

**MIAMI-DADE COUNTY  
APPROVED**

Expert Advice Available  
Monday - Friday  
7am - 5pm PST  
**(844) 671-6045**



@QuickBOLTsolar



@quickbolt



@QuickBOLT

**DISCLAIMER:**

We make every effort to ensure that all the information contained within our catalog is complete and accurate. QuickBOLT reserves the right to make any changes or corrections to any information which may have been published in error. Part numbers, quantities, and weights are subject to change without notice. For any questions or concerns contact your local sales rep or (844) 671-6045.

# CONTENTS

4

**ASPHALT, EPDM, & TPO** ROOF MOUNTS

---

12

**ALL TILE** ROOF MOUNTS

---

15

**FLAT TILE** ROOF MOUNTS

---

17

**CURVED TILE** ROOF MOUNTS

---

20

**STONE COATED STEEL** ROOF MOUNTS

---

23

**METAL** MOUNTS

---

26

**CONDUIT** MOUNTS

---


28

**ACCESSORIES**

**THIS DIGITAL CATALOG HAS CLICKABLE LINKS:**

- the table of contents above leads to pages
- product photos lead to their order pages



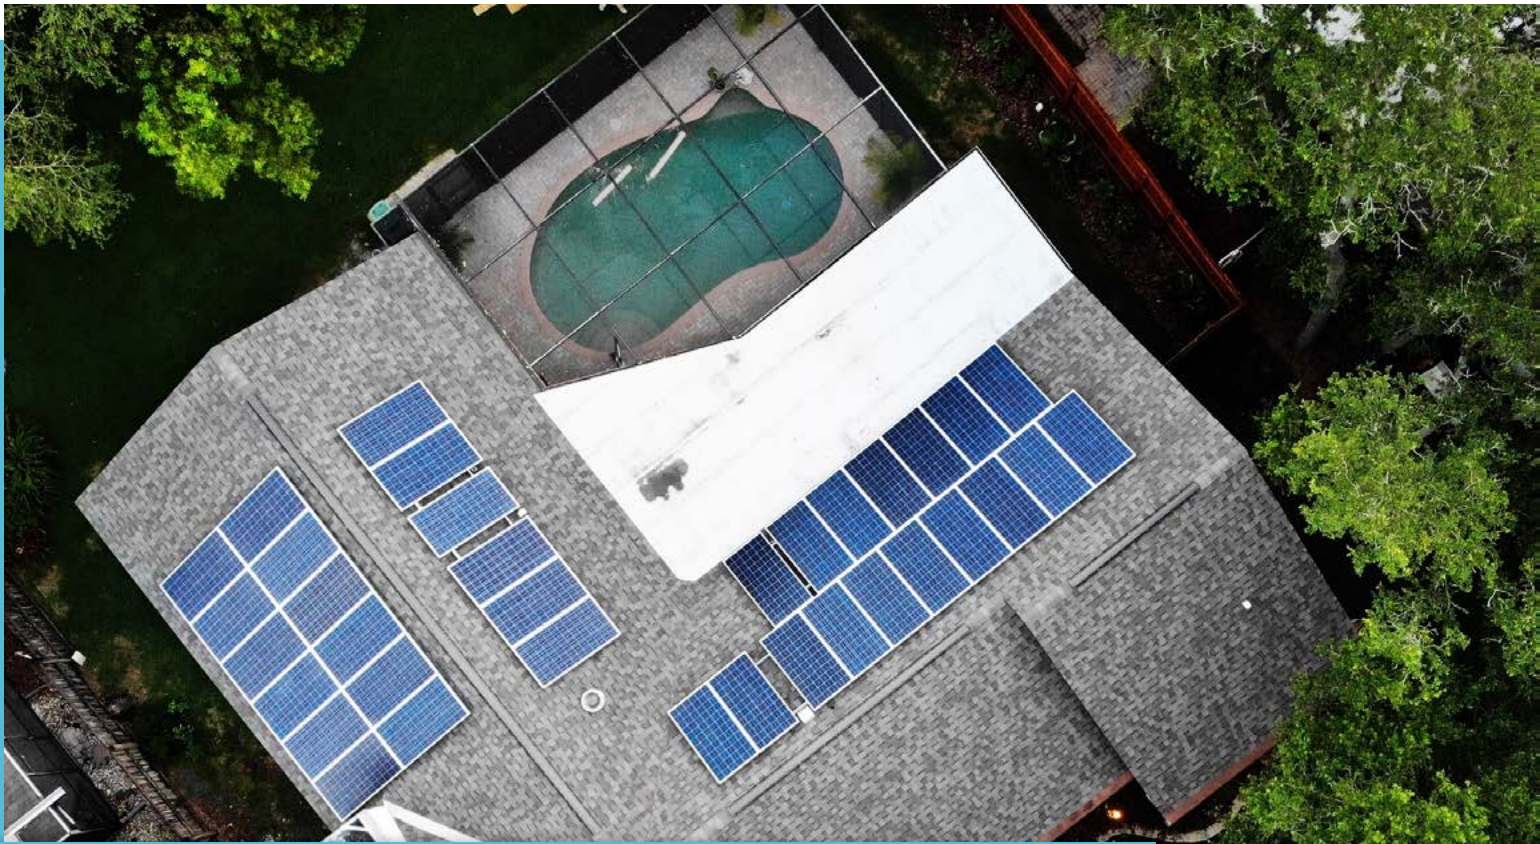

# ASPHALT, EPDM, & TPO ROOF MOUNTS

QuickBOLT has the most innovative line of Asphalt Shingle Roof Mounts in the industry.

Our QuickBOLT with Microflashing® is the future of Asphalt Shingle Roof solar mounting. Use the QuickBOLT to save time and money by installing faster, eliminating the need for bulky aluminum flashing, and completing more residential jobs. The installers' liability is also reduced, as Microflashing® can be installed directly over the shingles and does not require the removal of any nails. The QuickBOLT is now tested and approved for TPO roofs.



## AVAILABLE ONLINE:



UL Certification



Specs & Test  
Results



Racking  
Compatibility



Installation  
Instructions



Videos

MIAMI-DADE COUNTY  
APPROVED

## DECK MOUNT

Butyl Bottom | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



Low Profile

PN#	BOX QTY
16319	Mounts (36) + 5/16 X 2 1/2" Hex Lags w/ Sealing Washers (144)
16320	Black Mounts (36) + 5/16 X 2 1/2" Hex Lags w/ Sealing Washers (144)

Deck or Rafter Mount.

Only 4 Screws required for Deck Mounting. Butyl-backed for Peel-and-place install.

No-predrilling when installed direct to deck. Mount in 20 seconds or less.

**UL Certified | Miami-Dade NOA 23-1122.07**

MIAMI-DADE COUNTY  
APPROVED

## DECK MOUNT WITH T-BOLT

Butyl Bottom | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



Low Profile

PN#	BOX QTY
17772	Mounts (36) + 5/16 X 2 1/2" Hex Lags w/ Sealing Washers (144) + T-Bolt and Nut (36)

Deck or Rafter Mount.

Fastest installation in the industry.

Only 4 Screws required for Deck Mounting. Butyl-backed for Peel-and-place install.

No-predrilling when installed direct to deck. Mount in 20 seconds or less.

**UL Certified | Miami-Dade NOA 23-1122.07**

## DECK MOUNT

Silicone Bottom | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



Low Profile

PN#	BOX QTY
16317	Mounts (36) + 5/16 X 1 3/4" Hex Lags w/ Umbrella Washers (144)
16318	Black Mounts (36) + 5/16 X 1 3/4" Hex Lags w/ Umbrella Washers (144)

Direct to deck - no need to attach to rafters.

T-Foot Mount is backed with silicone.

Now tested & approved for TPO roofs.

Mount in 20 seconds or less.

**UL Certified.**

MIAMI-DADE COUNTY  
APPROVED

## QB2

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

PN#	BOX QTY
17660	4" QB2 Bolts (25)
17661	SS L-Foot for QB2 (25)
17861	Black L-Foot for QB2 (25)
17662	4" QB2 Bolts + L-Foot + 3" Microflashing® (25ea.)
17862	4" QB2 Bolts + Blk L-Foot + 3" Microflashing® (25ea.)

Error-proof torque-driven compression tech.

Sealant is optional.

**UL Certified | Miami-Dade NOA 24-0306.05**

BEST  
SELLER

Patent #8448407



MIAMI-DADE COUNTY  
APPROVED



## QB2 WITH T-BOLT

With 3" Microflashing® | Fixed Height

- Asphalt Shingle
- TPO Roofing
- Side Mount
- 3" Microflashing®
- Low Profile

Patent #8448407

PN#	BOX QTY
17771	4" QB2 Bolts + L-Foot + 3" Microflashing® + T-Bolt and Nut (25ea.)

Only 3 components.  
Error-proof torque-driven compression tech.  
Fastest installation in the industry.  
Tested & approved for TPO roofs.  
Sealant is optional.  
**UL Certified | Miami-Dade NOA 24-0306.05**

MIAMI-DADE COUNTY  
APPROVED



## QB2

With 4" Microflashing® | Fixed Height

- Asphalt Shingle
- TPO Roofing
- Side Mount
- 4" Microflashing®
- Low Profile


Patent #8448407

PN#	BOX QTY
17663	4" QB2 Bolts + L-Foot + 4" Microflashing® (20ea.)
17863	4" QB2 Bolts + Blk L-Foot + 4" Microflashing® (20ea.)

Only 3 components.  
Error-proof torque-driven compression tech.  
Fastest installation in the industry.  
Tested & approved for TPO roofs.  
4" Microflashing® provides more coverage.  
Sealant is optional.  
**UL Certified | Miami-Dade NOA 24-0306.05**

PN# 17662  
PATENT#  
8448407

QB2's BoltSeal® technology physically and visually indicates when a rafter is missed...

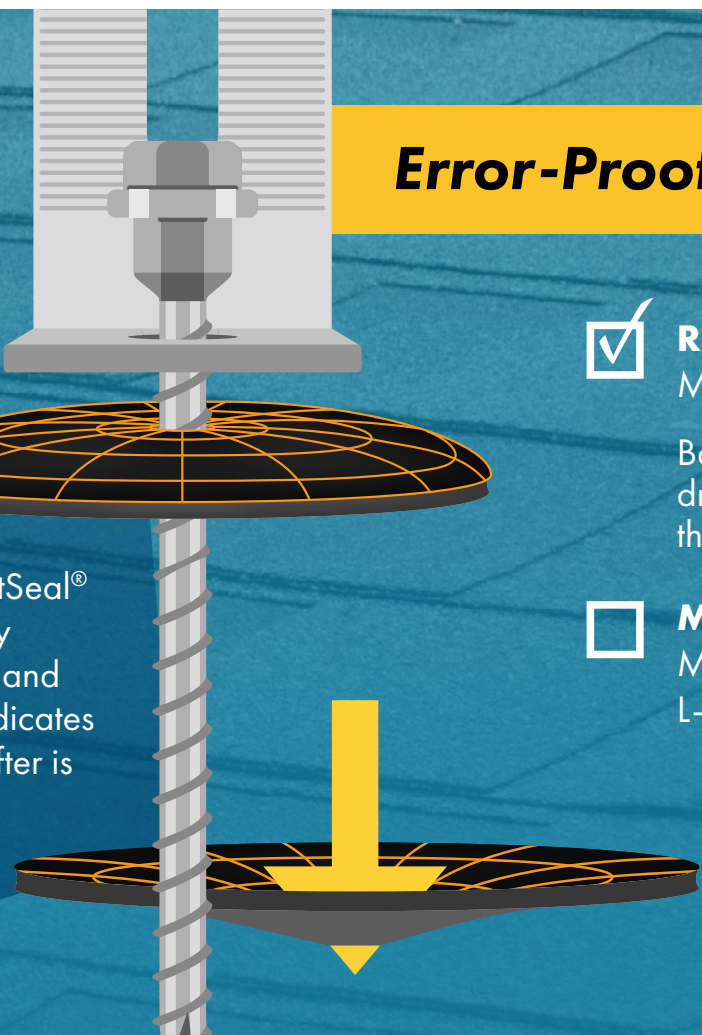

# Error-Proof Solar Mounting Tech

- Rafter Hit: BoltSealed®**  
Microflashing® compressed & L-Foot secured.  
  
BoltSeal® technology relies on torque-driven compression – if it can't compress then it won't seal.
- Missed Rafter: Not BoltSealed®**  
Microflashing® will not compress, and the L-foot can easily be rotated

**Know when you've  
hit the rafter**

MIAMI-DADE COUNTY  
APPROVED



Patent #8448407

## DUAL FLASHED QB2

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

PN#	BOX QTY
17662DF	4" QB2 Bolts + SS L-Foot + 3" Microflashing® + Miniflashing® (50ea.)
17862DF	4" QB2 Bolts + SS Black L-Foot + 3" Microflashing® + Miniflashing® (50ea.)

Error-proof torque-driven compression tech.  
Dual Drive Shoulder Screw.

Tested & approved for TPO roofs.

Sealant is optional.

**UL Certified | Miami-Dade NOA 24-0306.05**



Patent #8448407

## SPLIT TOP QB2

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

PN#	BOX QTY
17961	Black Split Top L-Foot
17962	4" QB2 Bolts + Blk Split Top L-Foot + 3" Microflashing® (25ea.)

Only 3 components.

Split Top L-Foot for compatibility with saddle attachments.

Error-proof torque-driven compression tech.

Fastest installation in the industry.

Sealant is optional.

**UL Certified.**



Patent #8448407

## SPLIT TOP QB2

With 4" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

PN#	BOX QTY
17961	Black Split Top L-Foot
17963	4" QB2 Bolts + Blk Split Top L-Foot + 4" Microflashing® (25ea.)

Only 3 components.

Split Top L-Foot for compatibility with saddle attachments.

Error-proof torque-driven compression tech.

Fastest installation in the industry.

Sealant is optional.

**UL Certified.**



Patent #8448407

## DUAL FLASHED SPLIT TOP QB2

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

PN#	BOX QTY
17962DF	4" QB2 Bolts + Blk Split Top L-Foot + 3" Microflashing® + Miniflashing® (50ea.)

Only 3 components.

Split Top L-Foot for compatibility with saddle attachments.

Error-proof torque-driven compression tech.

Sealant is optional.

**UL Certified.**





### LOW PROFILE QB1

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17664	5.25" Bolts (25)
15894SS	SS L-Foot for Low Profile QB1 (25)
17666	Bolts + 3" Microflashing® (25ea.)
17667SS	Bolts + 3" Microflashing® + SS L-Foot + Nuts (25ea.)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
Tested & approved for TPO roofs.

**UL Certified.**



### LOW PROFILE QB1

With 4" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17664	5.25" Bolts (25)
17720	Bolts + 4" Microflashing® (25ea.)
17721SS	Bolts + 4" Microflashing® + SS L-Foot + Nuts (20ea.)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
4" Microflashing® provides more coverage.  
Tested & approved for TPO roofs.

**UL Certified.**



### DUAL FLASHED LOW PROFILE QB1

With Miniflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17667DF	5 1/4" Bolts (50) + 3" Microflashing® (50) + Miniflashing® + SS L-Foot (50) + Nuts (50)

Low Profile QB1 with Microflashing® and Miniflashing®.

No sealant required!



### SPLIT TOP QB1

With 3" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17894	Black Split Top L-Foot (25ea.)
17821	5.25" Bolts + 3" Microflashing® + Blk Split Top L-Foot + Nuts (25ea.)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
Split Top L-Foot for compatibility with saddle attachments.

Tested & approved for TPO roofs.

**UL Certified.**





**SPLIT TOP QB1**  
With 4" Microflashing® | Fixed Height



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Low Profile

Patent #8448407

PN#	BOX QTY
17894	Black Split Top L-Foot (25ea.)
17867	5.25" Bolts + 4" Microflashing® + Blk Split Top L-Foot + Nuts (25ea.)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
Split Top L-Foot for compatibility with saddle attachments.  
Tested & approved for TPO roofs.  
**UL Certified.**



**7" QB1**  
With 3" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17670	7" Bolts (25)
17671	Bolts + 3" Microflashing® (25ea.)
17672SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
Tested & approved for TPO roofs.  
**UL Certified.**



**7" QB1**  
With 4" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



4" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17670	7" Bolts (25)
17723	Bolts + 4" Microflashing® (25ea.)
17724SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
4" Microflashing® provides more coverage.  
Tested & approved for TPO roofs.  
**UL Certified.**



**8" QB1**  
With 3" Microflashing® | Adjustable



Asphalt Shingle



TPO Roofing



Side Mount



3" Microflashing®



Adjustable

Patent #8448407

PN#	BOX QTY
17678	8" Bolts (25)
17679	Bolts + 3" Microflashing® (25ea.)
17680SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry.  
Stainless Steel L-Foot.  
Longer Bolt provides more support.  
Tested & approved for TPO roofs.  
**UL Certified.**



**8" QB1**  
With 4" Microflashing® | Adjustable

Asphalt Shingle   TPO Roofing   Side Mount

4" Microflashing®   Adjustable

Patent #8448407

PN#	BOX QTY
17678	8" Bolts (25)
17726	Bolts + 4" Microflashing® (25ea.)
17727SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry. Stainless Steel L-Foot. 4" Microflashing® provides more coverage. Longer Bolt provides more support. Tested & approved for TPO roofs. **UL Certified.**



**9" QB1**  
With 3" Microflashing® | Adjustable

Asphalt Shingle   TPO Roofing   Side Mount

3" Microflashing®   Adjustable

Patent #8448407

PN#	BOX QTY
17686	9" Bolts (25)
17687	Bolts + 3" Microflashing® (25ea.)
17688SS	Bolts (20) + 3" Microflashing® (20) + SS L-Foot (20) + Nuts (40)

First & only Microflashing® in the industry. Stainless Steel L-Foot. Longer Bolt provides more support. Tested & approved for TPO roofs. **UL Certified.**



**9" QB1**  
With 4" Microflashing® | Adjustable

Asphalt Shingle   TPO Roofing   Side Mount

4" Microflashing®   Adjustable

Patent #8448407

PN#	BOX QTY
17686	9" Bolts (25)
17729	Bolts + 4" Microflashing® (25ea.)
17730SS	Bolts (15) + 4" Microflashing® (15) + SS L-Foot (15) + Nuts (30)

First & only Microflashing® in the industry. Stainless Steel L-Foot. 4" Microflashing® provides more coverage. Longer Bolt provides more support. Tested & approved for TPO roofs. **UL Certified.**



**3" & 4" MICROFLASHING®**  
For QuickBOLT

Asphalt Shingle   TPO Roofing

3" Microflashing®   4" Microflashing®

Patent #8448407

PN#	BOX QTY
17669	3" Microflashing® (25)
17659	4" Microflashing® (20)

First & only Microflashing® in the industry. Original Microflashing® design. EPDM on bottom, Stainless Steel on top. Compression-seals to composite shingle roof. Zero Reported Leaks. Tested & approved for TPO roofs. **UL Certified.**





**TALL L-FOOT**  
For QuickBOLT


-   
Asphalt Shingle
-   
TPO Roofing
-   
Side Mount

PN#	BOX QTY
15987BSS	SS Tall L-Foot (80)

Stainless Steel.  
Rail slot for adjustability connecting T-Bolts.



**OFFSET L L-FOOT**  
For QuickBOLT1

-   
Asphalt Shingle
-   
TPO Roofing
-   
Side Mount

PN#	BOX QTY
15891SS	SS Offset L-Foot for QB1 (25)

Stainless Steel.  
Rail slot for adjustability connecting T-Bolts.



**FLASHED L-FOOT MOUNTING KIT**  
Fixed Height | Black Galva Flashing





-   
Asphalt Shingle
-   
Side Mount
-   
Screw Kits

PN#	BOX QTY	SCREW SIZE
17713SS	Flashing + L-Foot + Screws (20ea.)	5/16" x 4"

Stainless Steel L-Foot mounting system.  
Stronger than Aluminum Flashing.



**FLASHED SPLIT TOP L-FOOT KIT**  
Adjustable | Black Galva Flashing

-   
Asphalt Shingle
-   
Side Mount
-   
Screw Kits
-   
Adjustable

PN#	BOX QTY	SCREW SIZE
17717SS	Flashing + L-Foot + Dacro Screws with Sealing Washer (20ea.)	1/4 X 3"

Stainless Steel L-Foot mounting system.  
Stronger than Aluminum Flashing.



# ALL TILE ROOF MOUNTS

QuickBOLT's line of All Tile Roof Mounts are the most popular QuickBOLT roof hooks because of their versatility.

Our All Tile Roof Mounts work on Curved and Flat Tile roofs, providing an alternative to stocking multiple SKUs and allowing you to reduce your inventory to a single part.

The wide range of adjustability and leverage points ensure that installers can use these mounts with any tile roofing style and work around inconveniently located rafters.



## AVAILABLE ONLINE:



UL Certification



Specs & Test Results



AZ Test Results



Racking Compatibility



Installation Instructions



Videos





**90° ALL TILE ROOF MOUNT**  
34mm - 42mm Height Range

 Flat Tile   
  Curved Tile   
  Side Mount  
 **ADJ** Adjustable   
  5/16 x 3   
  1/4 x 3  
 Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17700	10 Hooks	N/A
17702	10 Hooks/20 Screws	1/4" x 3"
17704	10 Hooks/20 Screws	5/16" x 3"

145.4mm arm length.  
161mm-169mm height off roof.  
**UL Certified.**



**90° ALL TILE ROOF MOUNT**  
34mm - 42mm Height Range | Long Arm

 Flat Tile   
  Curved Tile   
  Side Mount  
 **ADJ** Adjustable   
  5/16 x 3   
  1/4 x 3  
 Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17585	10 Hooks	N/A
17587	10 Hooks/20 Screws	5/16" x 3"
17589	10 Hooks/20 Screws	1/4" x 3"

120mm arm length.  
181mm-189mm height off roof.  
**UL Certified.**



**180° ALL TILE ROOF MOUNT**  
34mm - 42mm Height Range

 Flat Tile   
  Curved Tile   
  Bottom Mount  
 **ADJ** Adjustable   
  5/16 x 3   
  1/4 x 3  
 Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17578	10 Hooks	N/A
17600	10 Hooks/20 Screws	5/16" x 3"
17616	10 Hooks/20 Screws	1/4" x 3"

**UL Certified**



**90° ALL TILE ROOF MOUNT**  
45mm - 65mm Height Range

 Flat Tile   
  Curved Tile   
  Side Mount  
 **ADJ** Adjustable   
  5/16 x 3   
  1/4 x 3  
 Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17597	10 Hooks	N/A
17598	10 Hooks/20 Screws	1/4" x 3"
17599	1 Hook/ 2 Screws	1/4" x 3"

120mm arm length.  
Works with double height battens.  
**UL Certified.**




QB2, PN# 17662

# We've Got Your Back



## Fast Shipping

Get products when you need them.



## Huge Inventory

35 years of experience with importing and distribution.



## Price competitive

Your choice: Order direct or through your local distributor.



## Screws included

Easy bundled solution.



## Trusted & Protected

SolarInsure preferred mounting supplier | Miami Dade NOA for QB2 | UL Recognition | 4+ million QuickBOLTs installed & zero reported leaks.



## No Sealant Required

QB2 protects penetrations without sealant. Fewer costs for your jobs, less time spent installing, no sticky mess.



## Family-Owned Business

We know the ups and downs of growing a business and are dedicated to helping you expand your business while ensuring high customer satisfaction.



## Save Your Back with QB2

Less material & less weight on your back. Enough mounts for an average residential job fit in two small boxes for one trip up the ladder.





# FLAT TILE ROOF MOUNTS

QuickBOLT's line of Flat Tile Roof Mounts are the simple solution to installing solar on Flat Tile Roofs.

These durable mounts eliminate the need to drill through tiles, reducing install time and liability.

Our Heavy Duty [HD+] Flat Tile Mounts are ideal for high wind areas or installers who want to decrease the number of mounts needed to support an array.



	Mount Thickness	Span Length	Average Maximum Compression Load	Average Maximum Tensile Load
Flat Tile Mount	5mm	4 ft.	141lbs.	203 lbs.
[HD+] Flat Tile Mount	<b>7mm</b>	<b>6 ft.</b>	<b>691 lbs.</b>	<b>2222 lbs.</b>

## AVAILABLE ONLINE:



UL Certification



Specs & Test Results



AZ Test Results



Racking Compatibility




Installation Instructions



Videos



**90° FLAT TILE ROOF MOUNT**  
Fixed Height | 5mm Stainless Steel




Flat Tile Side Mount  
Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17540	20 Hooks	N/A
17542	20 Hooks/40 Screws	1/4" x 3"
17608	20 Hooks/40 Screws	5/16" x 3"

**UL Certified**



**180° FLAT TILE ROOF MOUNT**  
Fixed Height | 5mm Stainless Steel




Flat Tile Bottom Mount  
Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17544	20 Hooks	N/A
17546	20 Hooks/40 Screws	1/4" x 3"
17610	20 Hooks/40 Screws	5/16" x 3"

**UL Certified**



**90° [HD+] FLAT TILE ROOF MOUNT**  
Fixed Height | 7mm Stainless Steel




Flat Tile Side Mount  
Heavy Duty Screw Kits


PN#	BOX QTY	SCREW SIZE
17632	20 Hooks	N/A
17636	20 Hooks/40 Screws	5/16" x 4"

Can support a higher load.  
Less penetrations in the roof.  
For high wind areas.

**UL Certified.**

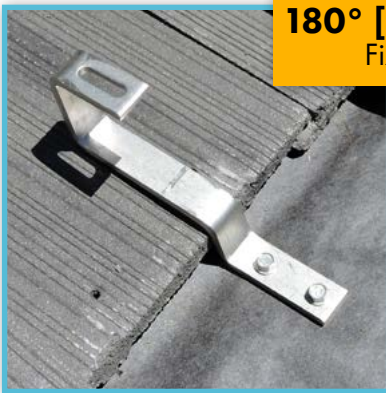

**180° [HD+] FLAT TILE ROOF MOUNT**  
Fixed Height | 7mm Stainless Steel



Flat Tile Bottom Mount  
Heavy Duty Screw Kits

PN#	BOX QTY	SCREW SIZE
17638	20 Hooks	N/A
17642	20 Hooks/40 Screws	5/16" x 4"

Can support a higher load.  
Less penetrations in the roof.  
For high wind areas.

**UL Certified.**





# CURVED TILE ROOF MOUNTS

Installers today can work on a wider variety of roofs than ever before with QuickBOLT's extensive line of Curved Tile Roof Mounts.

Our adjustable mounts have multiple leverage points and base widths to overcome inconveniently located rafters.

At QuickBOLT, we take pride in being able to provide such a versatile line of mounting solutions for curved tile roofs, the most popular roofing style in our home state of California.



## AVAILABLE ONLINE:



UL Certification



Specs & Test Results



AZ Test Results



Racking Compatibility



Installation Instructions



Videos




**90° CURVED TILE ROOF MOUNT**  
Fixed Height | 180mm Wide Base



Curved Tile




Side Mount



Screw Kits

PN#	BOX QTY	SCREW SIZE
17508	20 Hooks	N/A
17510	20 Hooks/40 Screws	1/4" x 3"

**UL Certified**

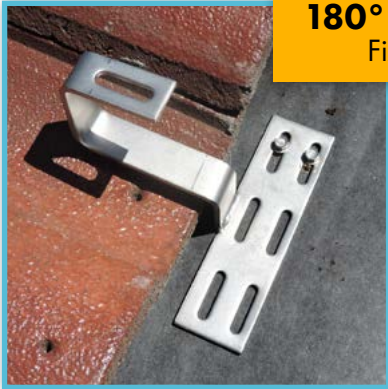


**180° CURVED TILE ROOF MOUNT**  
Fixed Height | 180mm Wide Base



Curved Tile




Bottom Mount



Screw Kits

PN#	BOX QTY	SCREW SIZE
17512	10 Hooks	N/A
17514	10 Hooks/20 Screws	1/4" x 3"

**UL Certified**

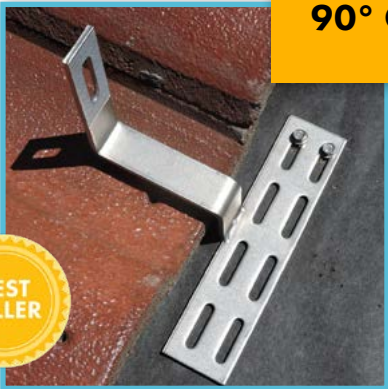

**90° CURVED TILE ROOF MOUNT**  
225mm Wide Base




Curved Tile



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17706	20 Hooks	N/A
17708	20 Hooks/40 Screws	1/4" x 3"
17710	20 Hooks/40 Screws	5/16" x 3"

Wider Base for more versatility.

**UL Certified.**



**180° CURVED TILE ROOF MOUNT**  
Adjustable Top | 105mm - 139mm Range




Curved Tile



Bottom Mount



Adjustable



Screw Kits

PN#	BOX QTY	SCREW SIZE
17516	10 Hooks	N/A
17518	10 Hooks/20 Screws	1/4" x 3"

Adjustable top for level array.

**UL Certified.**





**90° CURVED TILE ROOF MOUNT**  
For Clay Tiles | 69mm - 91mm Height Range

-  Curved Tile
-  Side Mount
-  Adjustable
-  Screw Kits

PN#	BOX QTY	SCREW SIZE
17520	10 Hooks	N/A
17522	10 Hooks/20 Screws	1/4" x 3"

**UL Certified**



**180° CURVED TILE ROOF MOUNT**  
For Clay Tiles | 69mm - 91mm Height Range

-  Curved Tile
-  Bottom Mount
-  Adjustable
-  Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17524	10 Hooks	N/A
17526	10 Hooks/20 Screws	1/4" x 3"
17528	10 Hooks/20 Screws	5/16" x 3"

**UL Certified**



**90° CURVED TILE ROOF MOUNT**  
42mm - 50mm Height Range

-  Curved Tile
-  Side Mount
-  Adjustable
-  Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17568	10 Hooks	N/A
17570	10 Hooks/20 Screws	1/4" x 3"
17572	10 Hooks/20 Screws	5/16" x 3"

Three points of adjustability.  
**UL Certified.**



**90° CURVED TILE ROOF MOUNT**  
42mm - 50mm Height Range

-  Curved Tile
-  Side Mount
-  Adjustable
-  Screw Kits

PN#	BOX QTY	SCREW SIZE
17574	10 Hooks	N/A
17576	10 Hooks/20 Screws	5/16" x 3"

Five points of adjustability  
**UL Certified**



# STONE COATED STEEL ROOF MOUNTS

QuickBOLT is the #1 solar mounting supplier for Metal Tile roofs, aka Stone Coated Steel. We designed our mounts with manufacturers like Decra and Westlake Royal Roofing so contractors can get into solar installation effortlessly. These hooks make your job installing solar fast and efficient.

Installers often refused to work on Stone Coated Steel roofs in the past because of the limited mounting solutions available on the market. These hooks now give installers the opportunity to efficiently provide solar to homeowners with these roofs.

Available in styles that work with roofs with or without battens.



## AVAILABLE ONLINE:



UL Certification



Specs & Test Results



Installation Instructions



Videos






**90° ROOF MOUNT**  
Fixed Height | 76.20mm Batten Bridge




SCS



Side Mount



5/16  
x 3



1/4  
x 3

Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17620	20 Hooks	N/A
17622	20 Hooks/40 Screws	1/4" x 3"
17624	20 Hooks/40 Screws	5/16" x 3"

**UL Certified.**

Fast, easy install.

Protects the roof – no penetrations to the roofing material.



**180° ROOF MOUNT**  
Fixed Height | 63.50mm Batten Bridge




SCS



Bottom Mount



5/16  
x 3



1/4  
x 3

Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17536	20 Hooks	N/A
17538	20 Hooks/40 Screws	1/4" x 3"
17606	20 Hooks/40 Screws	5/16" x 3"

**UL Certified.**

Fast, easy install.

Protects the roof – no penetrations to the roofing material.



**90° ROOF MOUNT**  
32mm - 48mm Range | 63.50mm Batten Bridge



SCS




Side Mount



Adjustable



5/16  
x 3



1/4  
x 3

Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17548	20 Hooks	N/A
17550	20 Hooks/40 Screws	1/4" x 3"
17612	20 Hooks/40 Screws	5/16" x 3"

**UL Certified.**

Fast, easy install.

Protects the roof – no penetrations to the roofing material.



**180° ROOF MOUNT**  
32mm - 48mm Range | 63.50mm Batten Bridge



SCS




Bottom Mount



Adjustable



5/16  
x 3



1/4  
x 3

Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17552	20 Hooks	N/A
17554	20 Hooks/40 Screws	1/4" x 3"
17614	20 Hooks/40 Screws	5/16" x 3"

**UL Certified.**

Fast, easy install.

Protects the roof – no penetrations to the roofing material.



**90° WIDE BASE ROOF MOUNT**  
32.5mm - 45mm Range | 63.50mm Batten Bridge




SCS



Side Mount



Adjustable



Screw Kits Available

PN#	BOX QTY	SCREW SIZE
17566	10 Hooks	N/A
17640	10 Hooks/20 Screws	5/16" x 3"

**UL Certified.**

For Curved and Flat Roofing Profiles.

Wide base allows for more range when bolting to the roof rafter.

3 points of attachment for the arm allows you to move arm according to the location of barrel on curved profile models.




**90° ROOF MOUNT**  
Fixed Height | For Use on Roofs with No Batten




SCS



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17626	20 Hooks	N/A
17628	20 Hooks/40 Screws	1/4" x 3"
17630	20 Hooks/40 Screws	5/16" x 3"

**UL Certified**

Made for direct to deck SCS profiles where no battens are in place.

Fast, easy install.

Protects the roof – no penetrations to the roofing material.




**90° ROOF MOUNT**  
Fixed Height | For Use on Roofs with No Batten




SCS



Side Mount



Screw Kits Available



PN#	BOX QTY	SCREW SIZE
17652	50 Hooks	N/A
17750	50 Hooks/100 Screws	1/4" x 3"
17752	50 Hooks/100 Screws	5/16" x 3"

**UL Certified**


Made for direct to deck SCS profiles where no battens are in place.

Ideal for interlocking SCS panels.

Fast, easy install.

Protects the roof – no penetrations to the roofing material.

**EXPAND YOUR SERVICES WITH STONE COATED STEEL**

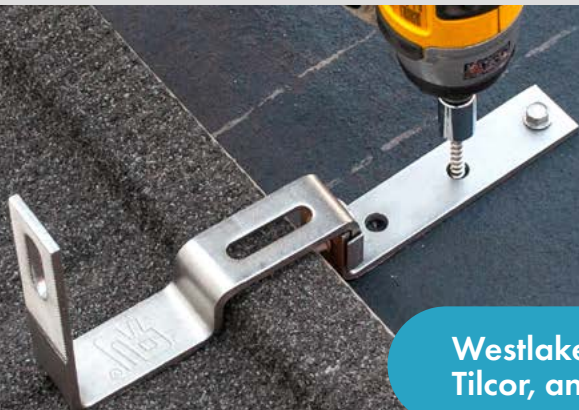

Westlake/Unified Steel, Decra, Tilor, and many more...







# METAL ROOF MOUNTS

Metal roofs are an excellent material for solar. Their durability often outlasts the lifetime of the array with less chance of a need for reroofing once the solar is installed.

By popular demand, we have expanded our mounting lines to include metal roofs. Explore our mounts for standing seam and corrugated metal.



## AVAILABLE ONLINE:



UL Certification




Specs & Test  
Results



Installation  
Instructions



**QB RIBRIDER**  
For Trapezoidal Rib Metal Roofs | Fixed Height Arm



Trapezoidal Rib Metal



Side Mount


PN#	BOX QTY
17766	32 Mounts with 75mm Butyl Base + 128 Screws
17767	1 Mount with 75mm Butyl Base + 4 Screws

**UL Certified**

For solar mounting on trapezoidal rib, corrugated metal roofs. Adjustable base for different rib widths & angles. Dual Rail-Mounting: 90 and 180 degrees. Butyl Base for water protection.



**THE THRONE**  
For Standing Seams Metal Roofs | Fixed Height



Standing Seam Metal



Side Mount


PN#	BOX QTY
17747	60 Mounts with 10x25mm Set Screws
17748	15 Mounts with 10x25mm Set Screws

**UL Certified**

Stainless Steel Integrated L-Foot & Screws for stronger mounting. Set Screws come assembled with L-Foot. Grip Plate with cross-knurling enhances pull-out resistance and prevents Set Screws from damaging the roof.




**METAL MOUNT KIT**  
Fixed Height



Metal



Side Mount



5/16" x 3/8"


PN#	BOX QTY
16267	SS L-Foot, Umbrella Washers, 5/16" x 3 1/2" Screws (20 ea.)

Easy Installation.

Compression-Seal – EPDM backed washers mold to the roof to seal against water. Compatible with a variety of metal roofs, including those with less than 3" of flat surface between ribs/seams.



**SPLIT TOP METAL MOUNT KIT**  
Fixed Height



Metal



Side Mount


PN#	BOX QTY
16268	Black Split Top L-Foot, Umbrella Washers, 5/16" x 3 1/2" Screws (20 ea.)

Easy Installation.

Compression-Seal – EPDM backed washers mold to the roof to seal against water. Compatible with a variety of metal roofs, including those with less than 3" of flat surface between ribs/seams.



**SPLIT TOP QUICKBOLT**  
With Umbrella Washer | Fixed Height



Metal



Side Mount

PN#	BOX QTY
17964	5.25" Bolts; Umbrella Washer; Low Profile Black Split L-Foot; Flange Nuts (25ea.)

Easy Installation.

Compression-Seal – EPDM backed washers mold to the roof to seal against water.


Compatible with a variety of metal roofs, including those with less than 3" of flat surface between ribs/seams.

# SOLUTIONS FOR SOLAR MOUNTING

Butyl Bottom Base for Superior Weatherproofing

Save time with pre-assembled mounts

Rotating L-Foot allows for Dual Rail-Mounting at 90 or 180 degrees

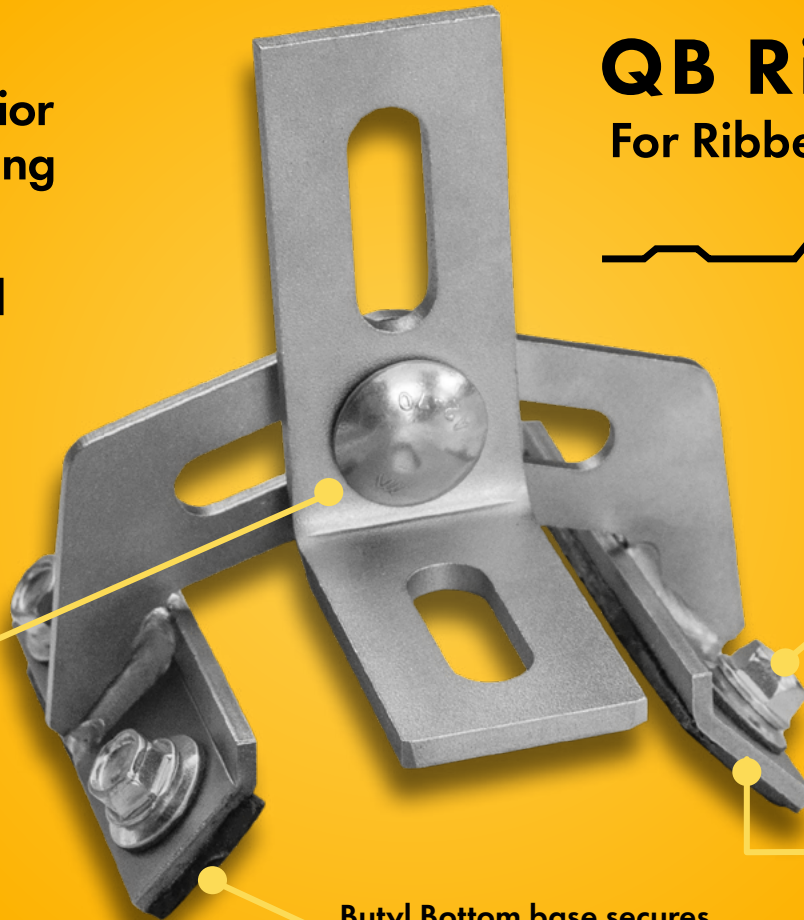

Butyl Bottom base secures mount during installation

**QB RibRider™**  
For Ribbed Metal Roofs



4 stainless steel self-tapping screws with sealing washers

Adjustable base that fits different rib widths and angles



# CONDUIT MOUNTS

At QuickBOLT, we are experts on mounts and conduit supports are no exception. Our electrical conduit solutions offer great flexibility in bundling cables and wires.

Designed for securing and supporting conduit.

We offer a variety of solutions for Asphalt Shingle, TPO, EPDM and Curved Tile roofs so you can choose the option that suits your job best.



## AVAILABLE ONLINE:



Specs & Test  
Results



Installation  
Instructions



Videos






**CONDUIT PUCK™**  
For Asphalt, EPDM, & TPO Roofs



Asphalt Shingle



Screw Kits

PN#	BOX QTY
16321	60 EPDM Mounts + 1/4" x 2" Mounting Screw
16322	20 EPDM Mounts + 1/4" x 2" Mounting Screw
16323	60 EPDM Mounts + Screw + 3/4" Clip
16324	10 EPDM Mounts + Screw + 3/4" Clip
16325	400 Clips + M5x25mm Hex Bolt
16326	100 Clips + M5x25mm Hex Bolt

Fast install - Mount anywhere & no predrilling. Protect the Roof with over the shingle mounts.



**CONDUIT MOUNTING BRACKET**  
Fixed Height | 38mm Bridge



Curved Tile

PN#	BOX QTY	SCREW SIZE
17734	60 Brackets	N/A

For running conduit. Offers flexibility in bundling cables/wires. Only 1 part for fast installation.



**QUICK RATCHET CONDUIT CLAMP**  
For QuickBOLT Mounting Kits



Asphalt Shingle



TPO Roofing

PN#	BOX QTY	SCREW SIZE
16255	10 Clamps	N/A

For running conduit. Attaches directly to any QuickBOLT. Offers flexibility in bundling cables/wires.

**Saving time saves money. Do both with QB2!**



**15 sec** per mount

**12.5 min** per system\*

**Microflashing®**

VS.



**75 sec** per mount

**62.5 min** per system\*

**Traditional Flashing**

Time does not include predrilling pilot holes

\* 50 mount average calculated for a 7kW system

QB2 with Microflashing® See page 5



# ACCESSORIES

QuickBOLT's most prominent accessories are our Solar Mounting Screws.

These screws are fully threaded to allow the screw to engage deeper into the wood, which gives it greater holding power than a partially threaded screw. The coarse threading reduces the torque when driving into the wood, reducing installation time. The Type 17 Auger Point clears debris out of the pilot hole, which reduces stress and splitting in wood. If you don't predrill the hole all of the way through, this point will finish it for you.



## AVAILABLE ONLINE:



UL Certification



Specs & Test  
Results



## 5/16" SOLAR MOUNT SCREWS

302 Stainless Steel



Screws

PN#	BOX QTY	SCREW SIZE
16988	20 Screws	5/16" x 3"
16990	40 Screws	5/16" x 3"
16989	20 Screws	5/16" x 3½"
16993	20 Screws	5/16" x 4"
16991	40 Screws	5/16" x 4"
15433	Hex Driver	1/2"

Hex Washer Head.  
Coarse Thread.  
Type 17 Point.

## 1/4" SOLAR MOUNT SCREWS

302 Stainless Steel



Screws

PN#	BOX QTY	SCREW SIZE
17556	20 Screws	1/4" x 3"
17558	40 Screws	1/4" x 3"
17559	20 Screws	1/4" x 4"
15437	Hex Driver	3/8"

Hex Washer Head.  
Coarse Thread.  
Type 17 Point.

## GALVA FLASHING

For Wide Based Roof Hooks



Flat Tile

Curved Tile

PN#	BOX QTY	SCREW SIZE
15890	20 Flashings	N/A

Flashing for wide based Hooks.  
Stronger than Aluminum Flashing.

## GALVA FLASHING

For Flat Tile Roof Hooks



Flat Tile

PN#	BOX QTY	SCREW SIZE
15991	40 Flashings	N/A

Flashing for Flat Tile Hooks.  
Stronger than Aluminum Flashing.

## QB1 & QB2 DRIVERS

For the QuickBOLT



PN#	BOX QTY	SIZE
17665	1 Driver for QB1	M6
17655	1 Driver for QB2	1/2" x 4"

For driving the QB1 and QB2.

## HEX HEAD BOLTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15670	20 Bolts	3/8" x 3/4"
15895	50 Bolts	5/16" x 3"

For rail attachment.

## T-BOLTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15990	100 Bolts	5/16" x 3/4"
15988	100 Bolts	M8 x 25MM
15998	100 Bolts	3/8" x 3/4"
15999	100 Bolts	3/8" x 1"
15992	100 Bolts	5/16" x 1"
16001	100 Bolts + Nut	3/8" x 1 1/4"
16002	100 Bolts	3/8" x 1 1/4"
16062	100 T-Bolts w/Loctite + Nut. Ironridge Rail compatible.	3/8" x 1"

## FLANGE NUTS

18-8 Stainless Steel



PN#	BOX QTY	SCREW SIZE
15669	20 Nuts	3/8-16"
15879	20 Nuts	5/16-18"
15989	100 Nuts	M8

For securing L-Foot to QuickBOLT.





AVL Approved

and more...

## AVAILABLE ONLINE

### INFORMATIONAL VIDEOS

QuickBOLT provides its users with a wide range of informational videos. From installation videos to product knowledge to industry updates, we pride ourselves on creating helpful videos for our customers.



### PERMIT PACKETS

All of our Roof Mounts have their own Permit Packet, making your job easier. Submit to your AHJ for streamlined approval. Each packet includes:

- Spec Sheets
- Test Results
- UL Certification (when applicable)
- AZ Testing (when applicable)
- Racking Compatibility (when applicable)
- Installation Instructions

**EXPLORE WHAT'S POSSIBLE ON QUICKBOLT.COM**

# FEATURED PARTNERS



QuickBOLT with Microflashing®. See page 5-10.



QUICKBOLT.COM  
(844) 671-6045

Corporate Headquarters  
5830 Las Positas Road  
Livermore, CA 94551