



ALL TILE ROOF HOOK FOR BOTTOM MOUNT RAILS; ADJUSTABLE





A DIVISION OF QUICKSCREWS INTERNATIONAL CORP

TABLE OF CONTENTS

3 SPEC SHEET QTY & MEASUREMENT INFORMATION

UL CERTIFICATION PROOF OF UL CERTIFICATION

4

6

8

INSTALLATION INSTRUCTIONS STEP-BY-STEP-INSTALLATION GUIDE

7 BUILDING CODE LETTER REGARDING STAMP DATES

> TEST RESULTS SUCH AS: WATER, UPLIFT, COMPRESSION, ETC.


Quickscrews International Corp. has changed the name of its solar division from SolarRoofHook to QuickBOLT

SPEC SHEET

Part #	Box Quantity	Screw Size
17578	10 Hooks	N/A
17579	1 Hook	N/A
17616	10 Hooks; 20 Screws	5/16″ x 3″
17617	1 Hook; 2 Screws	5/16″ x 3″
17600	10 Hooks; 20 Screws	#14 x 3"
17601	1 Hook; 2 Screws	#14 x 3″



Lener	Description	Jize/ Lengin
A	Mounting Screw Slot	9mm x 18mm
В	Rail Slot Size	10mm x 38mm
С	Length of Roof Hook	179.54mm
D	Bottom End to Top End	93mm - 102mm
E	Thickness	ómm
F	Adjustability Range	34mm - 48mm

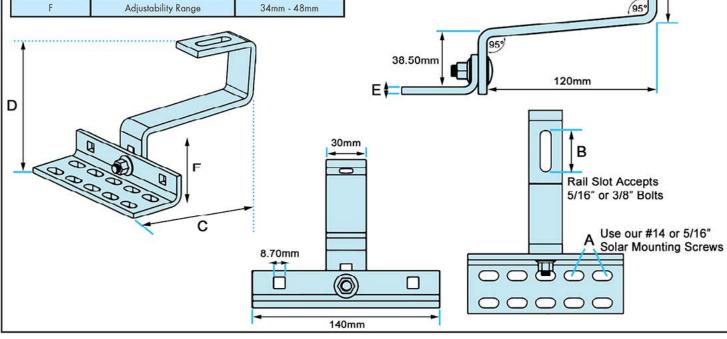

5830 Las Positas Road, Livermore CA 94551 | 3948 Airway Drive, Rock Hill SC 29732 Phone: (844) 671-6045 | Fax: (800) 689-7975 | www.solarroofhook.com

5830 Las Positas Road, Livermore CA 94551 | 3948 Airway Drive, Rock Hill SC 29732 Phone: (844) 671-6045 | Fax: (800) 689-7975 | www.quickbolt.com QuickBOLT is a division of Quickscrews International Corp. 67mm

50mm

UL CERTIFICATION

CERTIFICATE OF COMPLIANCE

Certificate Number Report Reference Date

E493748 E493748-20170817 2023-April-07

Issued to:

QuickBOLT a Division of Quickscrews International Corp 5830 Las Positas Rd Livermore CA, 94551 US

This is to certify that representative samples of MOUNTING SYSTEMS, MOUNTING DEVICES, CLAMPING DEVICES AND GROUND LUGS FOR USE WITH PHOTOVOLTAIC MODULES AND PANELS - COMPONENT

See Addendum Page for Product Designation(s).

Have been evaluated by UL in accordance with the component requirements in the Standard(s) indicated on this Certificate. UL Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for installation in complete equipment submitted for investigation to UL LLC.

UL 2703, Mounting systems, mounting devices, Standard(s) for Safety: clamping/retention devices, and ground lugs for use with flatplate photovoltaic modules and panels-. Additional Information: See the UL Online Certifications Directory at

https://ig.ulprospector.com for additional information

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Recognized Component Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Recognized Component Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Recognized Component Mark on the product.

Olbrah euning - Crese

Deborah Jennings-Conner, VP Regulatory Services UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations/

CERTIFICATE OF COMPLIANCE


Certificate Number Report Reference Date

E493748 E493748-20170817 2023-April-07

This is to certify that representative samples of the product as specified on this certificate were tested according to the current UL requirements

Models:

USR – Component, Roof Mounting Hook Units, Models 15891 15893 15987 16000 16317 16318 16319 16320 16988 16990 16991 16993 17508 17509 17510 17511 17512 17513 17514 17515 17516 17517 17518 17519 17520 17521 17522 17523 17524 17525 17526 17527 17536 17537 17538 17539 17540 17541 17542 17543 17544 17545 17546 17547 17548 17549 17550 17551 17552 17553 17554 17555 17556 17558 17559 17560 17566 17567 17568 17569 17570 17571 17572 17573 17574 17575 17576 17577 17578 17579 17580 17585 17586 17587 17588 17589 17592 17596 17597 17598 17599 17600 17601 17606 17607 17608 17609 17610 17611 17612 17613 17614 17615 17616 17617 17618 17620 17621 17622 17623 17624 17625 17626 17627 17628 17629 17630 17631 17632 17633 17636 17637 17638 17639 17640 17641 17642 17643 17646 17647 17648 17649 17650 17651 17652 17653 17654 17659 17664 17667 17669 17670 17671 17672 17673 17678 17679 17680 17681 17686 17687 17688 17689 17700 17701 17702 17703 17704 17705 17706 17707 17708 17709 17710 17711 17712 17717 17718 17750 17751 17752 17753 17759 15891-10 15891BLK-10 15987A 15987B 17667SS 17672SS 17680SS 17688SS 17713SS 17720 17721SS 17723 17724SS 17726 17727SS 17729 17730SS 15894SS 15891SS 15987BSS 17660 17661 17662 17663 17747 17748





Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations/

INSTALL INSTRUCTIONS
















RECOMMENDED MATERIALS

- Rafter locater
- Chalk or crayon
- Drill Bit
- · Sealant compatible with roofing materials

INSTALLATION INSTRUCTIONS


- 1. Remove the tiles from the install area
- 2. Locate and mark the rafters
- 3. Place the mount and predrill holes
- 4. Fill the predrilled holes with sealant
- 5. Drive the Mounting Screws
- 6. Place the tiles back over the roof mount

ADJUSTABLE HOOKS

- Adjust the mount as need be either before or after installation
- The ideal location for the mount on Curved Tiles is over the valley of the tile to minimize drainage

TORQUE REQUIREMENTS

M8 Bolt requires 15 minimum torque ft-lb



IF USING GALVA FLASHING

- 1. Make a cut in the paper
- 2. Apply sealant to the underside of the Galva Flashing
- 3. Slide the Flashing underneath the paper or nail down edges
- 4. Cover the edges of the Galva Flashing with sealant

















BUILDING CODE LETTER



March 22nd, 2023

To whom this may concern,

QuickBOLT is committed to excellence. The parts tested are durable goods, meaning the material composition and detailed specifications of the parts do not change. Therefore, all stamps are current. Any part tested will have the same results no matter what year the tests are performed. All testing and reports are current and valid with 2022 CBC standards.

SolarRoofHook is the previous name of QuickBOLT. Any test result referencing SolarRoofHook is referring to a QuickBOLT product.

All our parts were tested by a third-party test facility, in possession of a current engineering license for the state where the tests were performed for the following.

- 1. Uplift test
- 2. Downward load test
- 3. Lateral Test Asphalt Mounts, and Metal Mounts only
- 4. ASTM E2440 and ASTM E330 Waterproof Tests QuickBOLT only

The following is an excerpt from:

CALIFORNIA BOARD FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS guide to Engineering & Land Surveying for City and County Officials Page 12, Line 27

27. If the license has expired between the time the engineering documents were prepared and the time when the local agency's review is performed, do the documents need to be re-sealed by a licensee with a current license? (B&P Code §§ 6733, 6735, 6735.3, 6735.4)

As long as the license was current at the time the engineering documents were prepared, the documents do not need to be re-sealed prior to review by the local agency. However, any changes (updates or modifications) to the documents that are made following the review by the local agency would have to be prepared by a licensed engineer with a current license and those changes would have to be signed and sealed.

We trust the information provided will resolve any request for the test reports submitted to have a stamp from the current year.

Regards,

Rick Gentry Executive Vice President

ENGINEERING REPORT



APPLIED MATERIALS & ENGINEERING, INC. 980 41st Street Tel: (510) 420-8190 Oakland, CA 94608 FAX: (510) 420-8186 e-mail: info@appmateng.com

April 1st, 2015

Mr. Rick Gentry SolarRoofHook a division of Quickscrews International Corp. 5830 Las Positas Road Livermore, CA 94551

Project Number 115169C

Subject: STA18038 All Tile Adjustable 180° Roof Hook Laboratory Load Testing

Dear Mr. Gentry:

As requested, Applied Materials & Engineering, Inc. (AME) has completed load-testing the All Tile Adjustable 180° roof hook (see Appendix A, Figure 1). The purpose of our testing was to evaluate the compressive, and tensile (uplift) load capacity of the All Tile Adjustable 180° roof hook attached to a 2"x4" Douglas Fir Rafter using two #14x3" screws.

SAMPLE DESCRIPTION

Mockup samples were assembled in our laboratory on March 26th & 27th, 2015. Mockup configuration consisted of three 16" long rafters at 4.5"o.c., screwed to 1/2" Structural I plywood. The All Tile Adjustable 180° roof hook is attached through the plywood into a rafter with two fasteners. The roof hook is positioned in the center of the base plate with the fasteners installed at the farthest end.

TEST PROCEDURES & RESULTS

1. Compressive Load Test

A total of three tests were conducted for compressive load capacity on March 26th, 2015 using a United Universal testing machine. Samples were rigidly attached to the testing machine and a compressive load was applied to the hook. The samples were loaded in compression at a constant rate of axial deformation of 0.09 in. /min. without shock until the hook was bent and came in contact with the test board; displacement at maximum load was recorded. Based on the above testing, the average maximum compression load of the All Tile Adjustable 180° roof hook attached to a 2"x4" Douglas Fir rafter using two #14x 3" screws was determined to be 301 lbf. Detailed results are provided in Table I. Test setup and mode of failure are provided in Appendix B, Figure 1.

The specific gravity and moisture content of the rafter was tested in accordance with ASTM D2395, Method A (oven-dry). The specific gravity and moisture content were determined to be 0.375 and 13.9 %, respectively.

APPLIED MATERIALS & ENGINEERING, INC.

Project Number 115169C

Mr. Rick Gentry QUICKSCREWS INTERNATIONAL 5830 Las Positas Road Livermore, CA 94551

2. Tensile (Uplift) Load Test

A total of three tests were conducted for compressive load capacity on March 27th, 2015 using a United Universal testing machine. Samples were rigidly attached to the testing machine and an uplift load was applied to the hook. The samples were loaded in tension at a constant rate of axial deformation of 0.09 in. /min. without shock until failure occurred; displacement at maximum load was recorded. Based on the above testing, the average maximum uplift load of the All Tile Adjustable 180° attached to a 2"x4" Douglas Fir rafter using two #14x3" screws was determined to be 2041 lbf. Detailed results are provided in Table II. Test setup and mode of failure are provided in Appendix B, Figure 2.

The specific gravity and moisture content of the rafter was tested in accordance with ASTM D2395, Method A (oven-dry). The specific gravity and moisture content were determined to be 0.388 and 15.6 %, respectively.

Respectfully Submitted,

APPLIED MATERIALS & ENGINEERING, INC.

	PROFESSION	il the	
REGIST	No. 35535 Exp. 9/30/15	Firmen Taji	rian, Ph.D., P.E.
140	THE OF CALIFOR	**	

Reviewed By:

APPLIED MATERIALS & ENGINEERING, INC.

Mohammed Faryaz Laboratory Manager

TABLE I

COMPRESSIVE LOAD TEST RESULTS

ALL TILE ADJUSTABLE 180° ROOF HOOK (PART # STA18038)

PROJECT NUMBER 115169C

SAMPLE ID	MAXIMUM COMPRESSIVE LOAD (lbf)	DISPLACEMENT AT MAXIMUM LOAD (in.)	FAILURE MODE
C-1	308	2.0	Hook contact w/Plywood
C-2	291	2.4	Hook contact w/Plywood
C-3	304	2.1	Hook contact w/Plywood
AVERAGE	301	2.2	

TABLE II

TENSILE (UPLIFT) LOAD TEST RESULTS


ALL TILE ADJUSTABLE 180° ROOF HOOK (PART # STA18038)

PROJECT NUMBER 115169C

SAMPLE ID	MAXIMUM TENSILE LOAD (lbf)	DISPLACEMENT AT MAXIMUM LOAD (in.)	FAILURE MODE
T-1	2216	7.2	Fastener pullout
T-2	1708	6.5	Fastener pullout
T-3	2199	7.2	Fastener pullout
AVERAGE	2041	6.9	

3/16 Initials:DS Date: LAB EQUIPMENT USED Compression Machine: ELE S/N 070100000077 ELE S/N 00-13 SATEC S/N 400HVL1075 United S/N 890212 Measurement: Caliper S/N. Other:


All Tile Adjustable 180 Compression #1

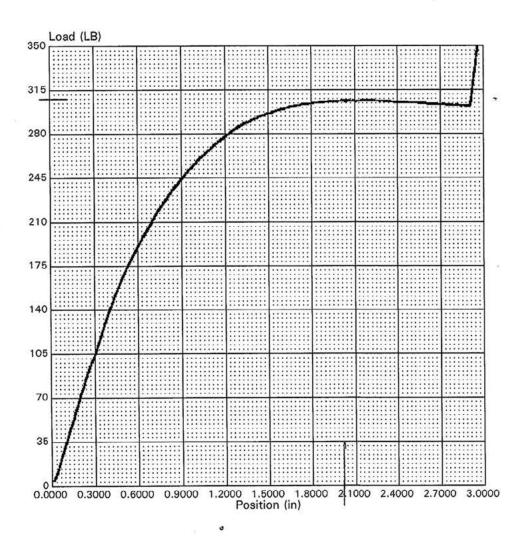

3/26 Initials: D3 Date:


LAB EQUIPMENT USED Compression Machine: ELE S/N 070100000077 _____ ELE S/N 00-13 _____ SATEC S/N 400HVL1075 _____ United S/N 890212 ____ Measurement: Caliper S/N _____ Other:

All Tile Adjustable 180 Compression #2

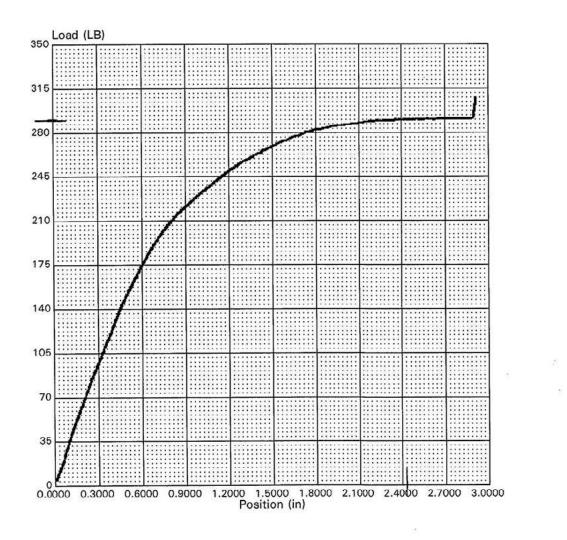

Initials: DS_Date: 3224 LAB EQUIPMENT USED Compression Machine: ELE S/N 070100000077 ... ELE S/N 00-13 _____ SATEC S/N 400HVL1075 United S/N 890212 ____ Measurement: Caliper S/N Other:


All Tile Adjustable Compression #3

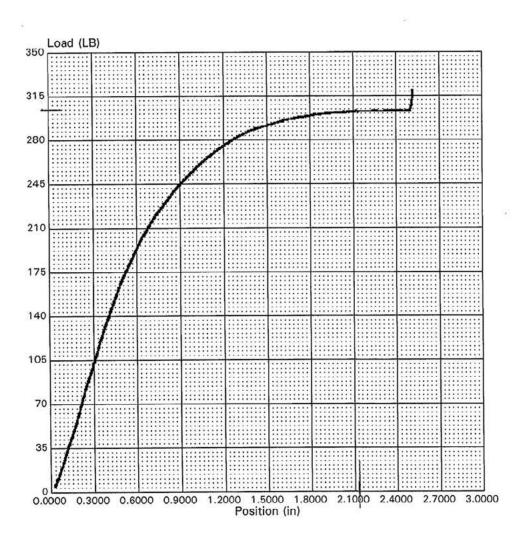

Date: Initials.DS

LAB EQUIPMENT USED Compression Machine: ELE S/N 070100000077 _____ ELE S/N 00-13 _____ SATEC S/N 400HVL1075 ____ United S/N 890212 X____ Measurement: Caliper S/N _____ Other:


All Tile Adjustable 180 Uplift #1

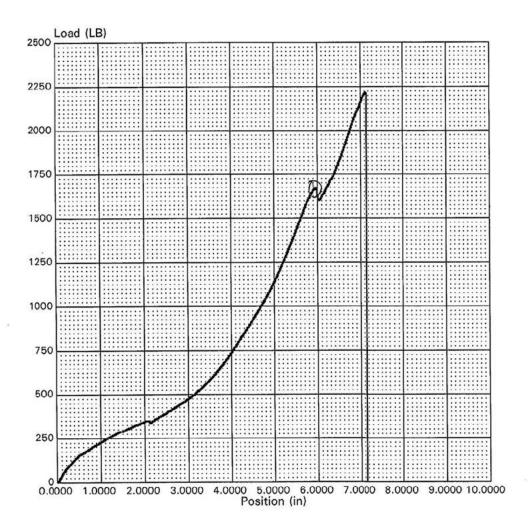

Date: 3/27 Initials.DS

LAB EQUIPMENT USED Compression Machine: ELE S/N 070100000077 _____ SATEC S/N 4001VL1075 _____ United S/N 890212 ____ Measurement: Caliper S/N _____ Other:

All Tile Adjustable 180 Uplift #2

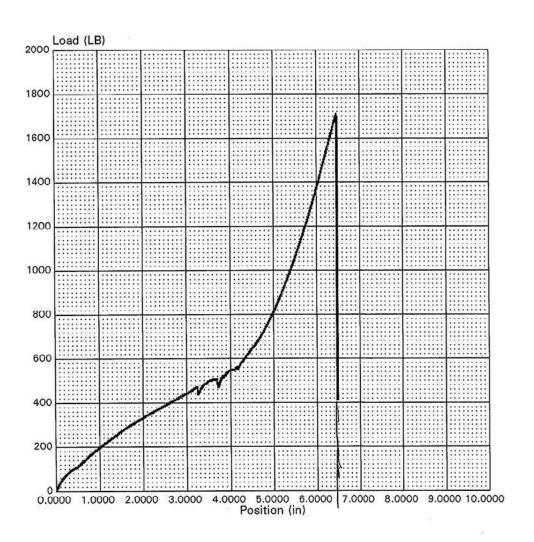

Initials: DS Date: 327 LAB EQUIPMENT USED Compression Machine: ELE S/N 07010000077 ELE S/N 00-13 SATEC S/N 400HVL1075 United S/N 890212 Measurement:

Caliper S/N Other:

All Tile Adjustable 180 Uplift #3

